
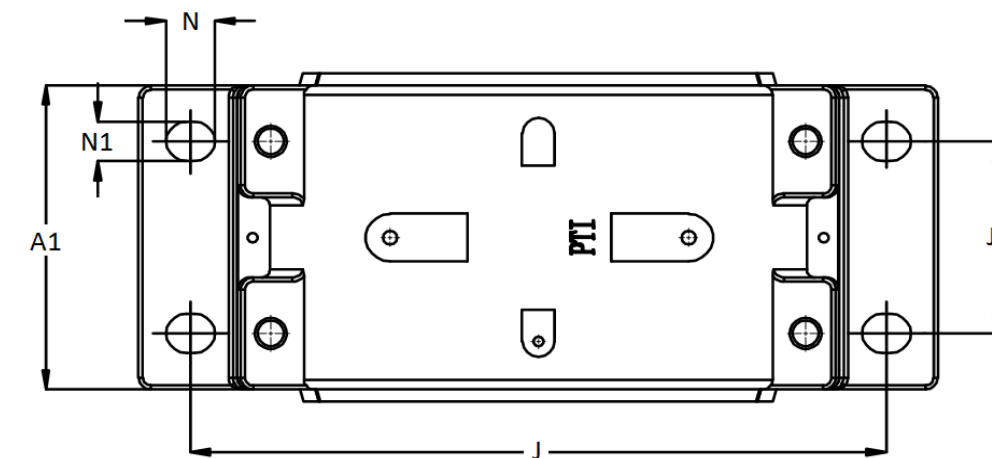
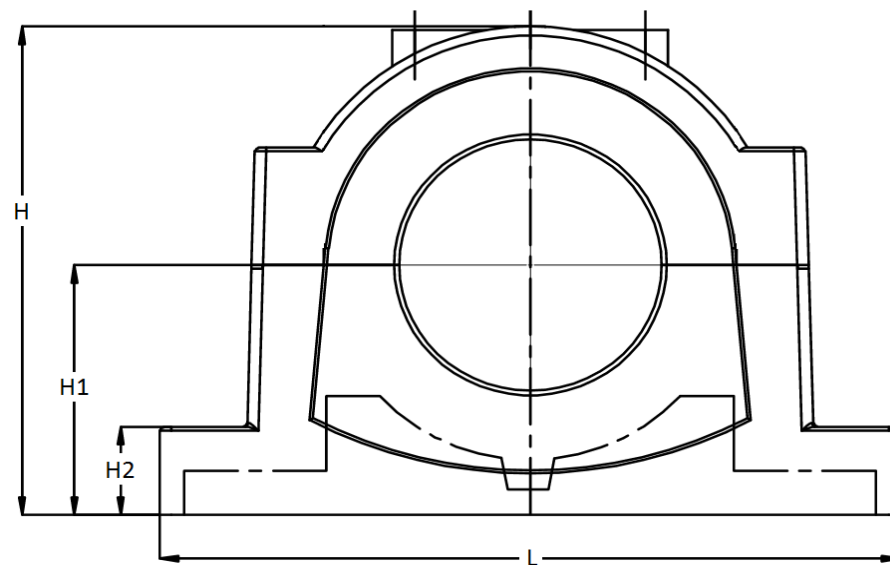


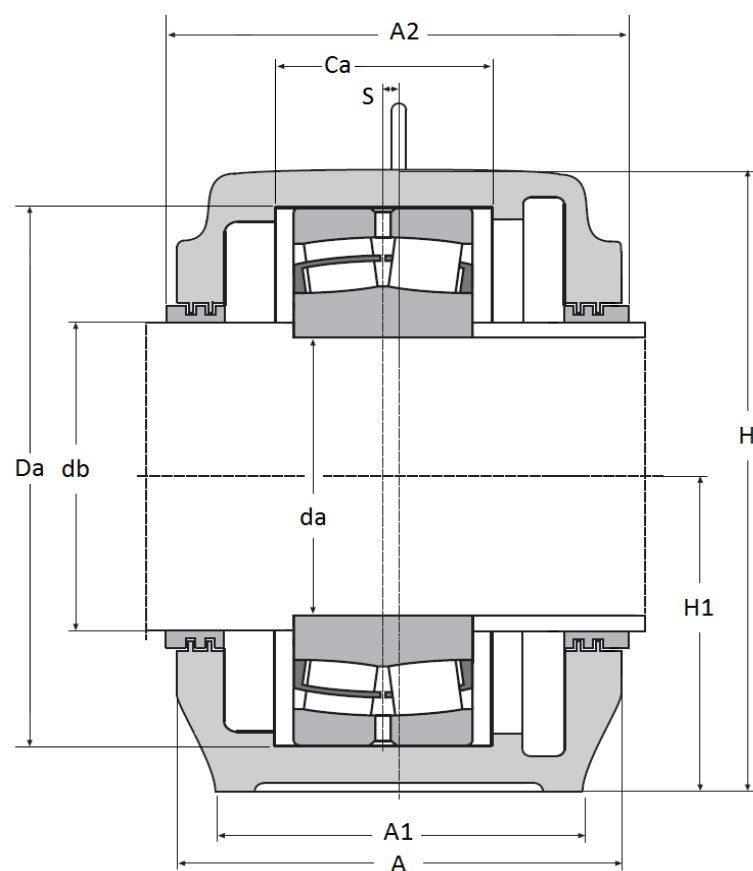

Housing	Shaft		Dimensions (mm)														Mounting	Weight	Labyrinth	Bearing	Fixing	End cover	O-Ring	Grease Qty
No.	da	db	Da	Ca	A	A1	A2	H	H1	H2	L	J	J1	N	N1	S	Bolt	(kg)	Seals		Rings		Ø * Length	First filling
SD 3234 G	170	190	310	122	260	210	270	375	190	80	560	480	120	34	28	10	M24	98	TS 40-190	23234	2 x FR 310-6	ETS48	4 x 660	1,9 kg
SD 3236 G	180	200	320	124	260	210	270	375	190	80	560	480	120	34	28	10	M24	98	TS 44	23236	2 x FR 320-6	ETS44	4 x 690	1,9 kg
SD 3238 G	190	210	340	132	280	230	290	411	210	85	610	510	130	42	35	10	M30	123	TS 48-210	23238	2 x FR 340-6	ETS48	4 x 730	2,2 kg
SD 3240 G	200	220	360	140	290	240	300	434	220	90	640	540	140	42	35	12	M30	139	TS 48	23240	2 x FR 360-6	ETS56	4 x 760	2,5 kg
SD 3244 G	220	240	400	164	310	260	315	474	240	95	700	600	150	42	35	12	M30	187	TS 56-240	23244	2 x FR 400-10	ETS52	4 x 830	3,0 kg
SD 3248 G	240	260	440	180	320	280	330	516	260	100	770	650	160	50	42	13	M36	221	TS 60-260	23248	2 x FR 440-10	ETS60	4 x 900	3,8 kg
SD 3252 G	260	280	480	194	350	310	360	591	300	110	830	710	190	50	42	22	M36	301	TS 64-280	23252	2 x FR 480-10	ETS72	4 x 970	5,6 kg

These Housings can also be manufactured of ductile iron or cast steel. Special kevlar or felt seals on request.

ООО "ПромБеринг", (812) 333-00-90, info@prombearing.ru
www.prombearing.ru