
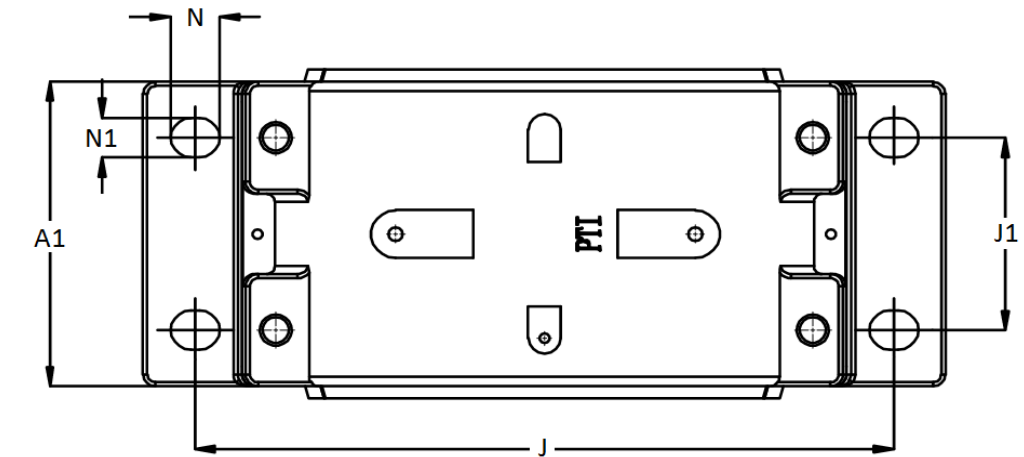
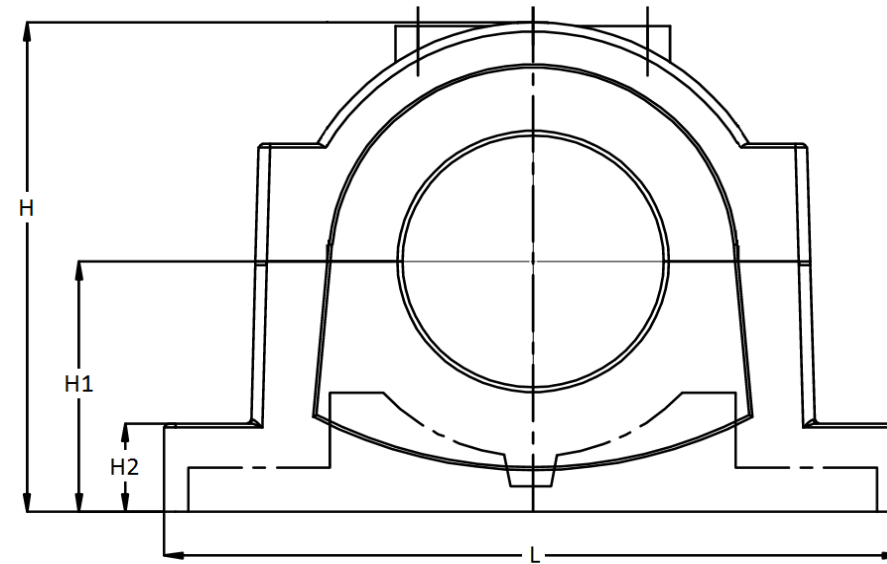


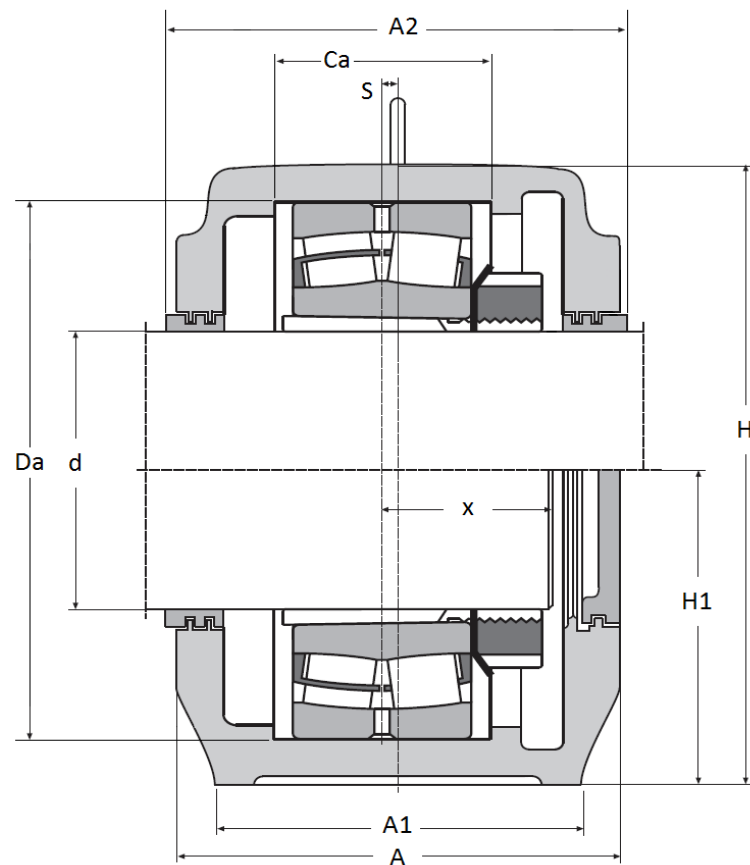

Housing	Shaft		Dimensions (mm)														Mount.	Weight	Labyrinth	Bearing	Adapter	Fixing	End cover	Grease Qty
No.	d	D _a	C _a	A	A ₁	A ₂	H	H ₁	H ₂	L	J	J ₁	x _{max}	N	N ₁	S	Bolt	(kg)	Seals		Sleeve	Rings		First filling
SD 3234 TS	150	310	122	260	210	270	375	190	80	560	480	120	112	34	28	10	M24	97,5	TS 40-150	23234 K	H 2334	2 x FR 310-6	ETS 44	1,9 kg
SD 3236 TS	160	320	124	260	210	270	375	190	80	560	480	120	112	34	28	10	M24	97,5	TS 38-160	23236 K	H 2336	2 x FR 320-6	ETS 38	1,9 kg
SD 3238 TS	170	340	132	280	230	290	411	210	85	610	510	130	122	42	35	10	M30	123	TS 40-170	23238 K	H 2338	2 x FR 340-6	ETS 44	2,2 kg
SD 3240 TS	180	360	140	290	240	300	434	220	90	640	540	140	128	42	35	12	M30	139	TS 48-180	23240 K	H 2340	2 x FR 360-6	ETS 48	2,5 kg
SD 3244 TS	200	400	164	310	260	315	474	240	95	700	600	150	136	42	35	12	M30	187	TS 48-200	23244 K	H 2344	2 x FR 400-10	ETS 52	3,0 kg
SD 3248 TS	220	440	180	320	280	330	516	260	100	770	650	160	146	50	42	13	M36	221	TS 52-220	23248 K	H 2348	2 x FR 440-10	ETS 52	3,8 kg
SD 3252 TS	240	480	194	350	310	360	591	300	110	830	710	190	170	50	42	22	M36	301	TS 64-240	23252 K	H 2352	2 x FR 480-10	ETS 64	5,6 kg
SD 3256 TS	260	500	196	350	310	360	591	300	110	830	710	190	170	50	42	22	M36	301	TS 60-260	23256 K	H 2356	2 x FR 500-10	ETS 60	5,6 kg
SD 3260 TS	280	540	212	370	330	380	631	320	115	880	750	200	181	50	42	23	M36	339	TS 64-280	23260 K	H 3260	2 x FR 540-10	ETS 64	6,9 kg

These Housings can also be manufactured of ductile iron or cast steel. Special kevlar or felt seals on request.

ООО "ПромБеринг", (812) 333-00-90, info@prombearing.ru
www.prombearing.ru